



1. Unscrew the control box and take it off.





## 2. Disconnect the wirings.

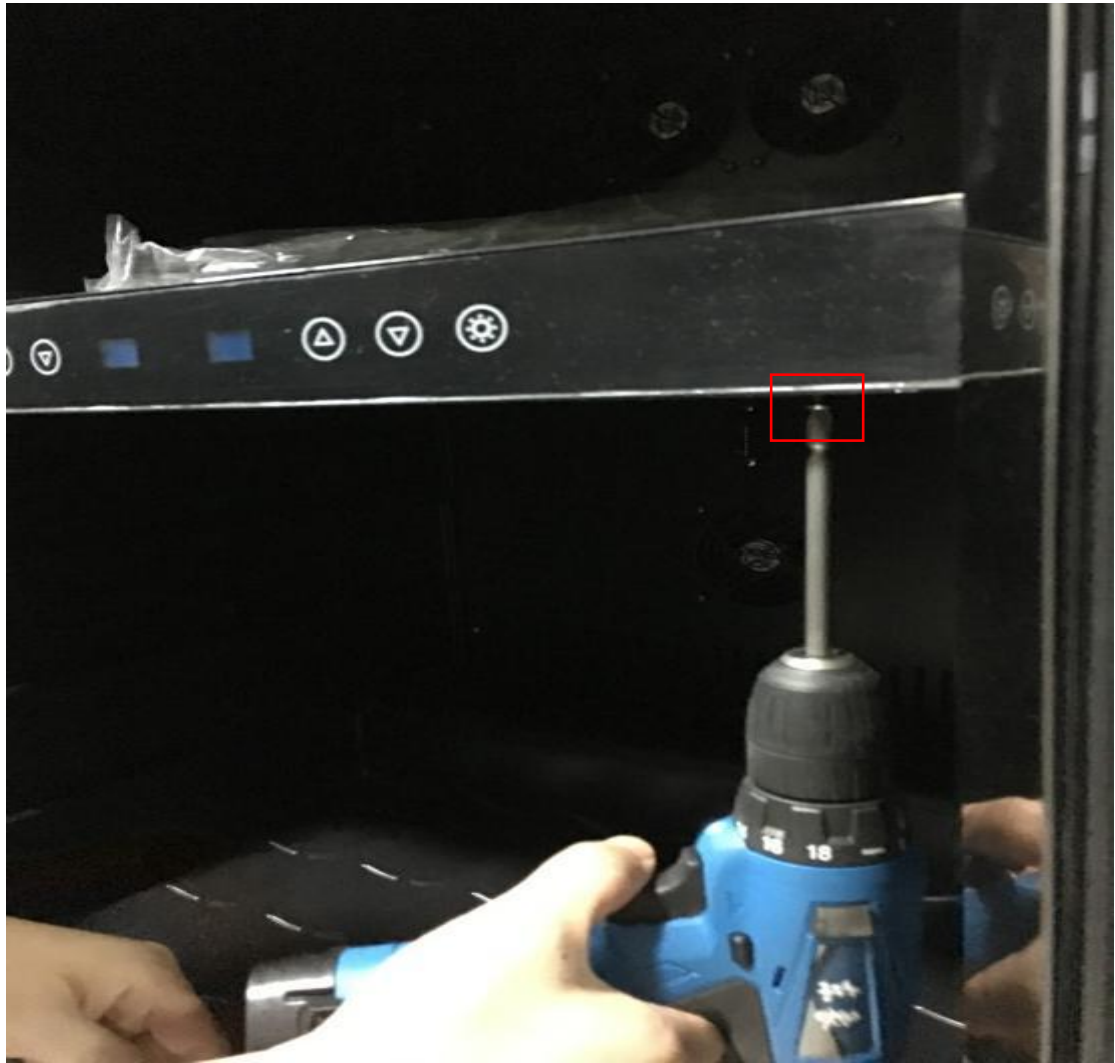

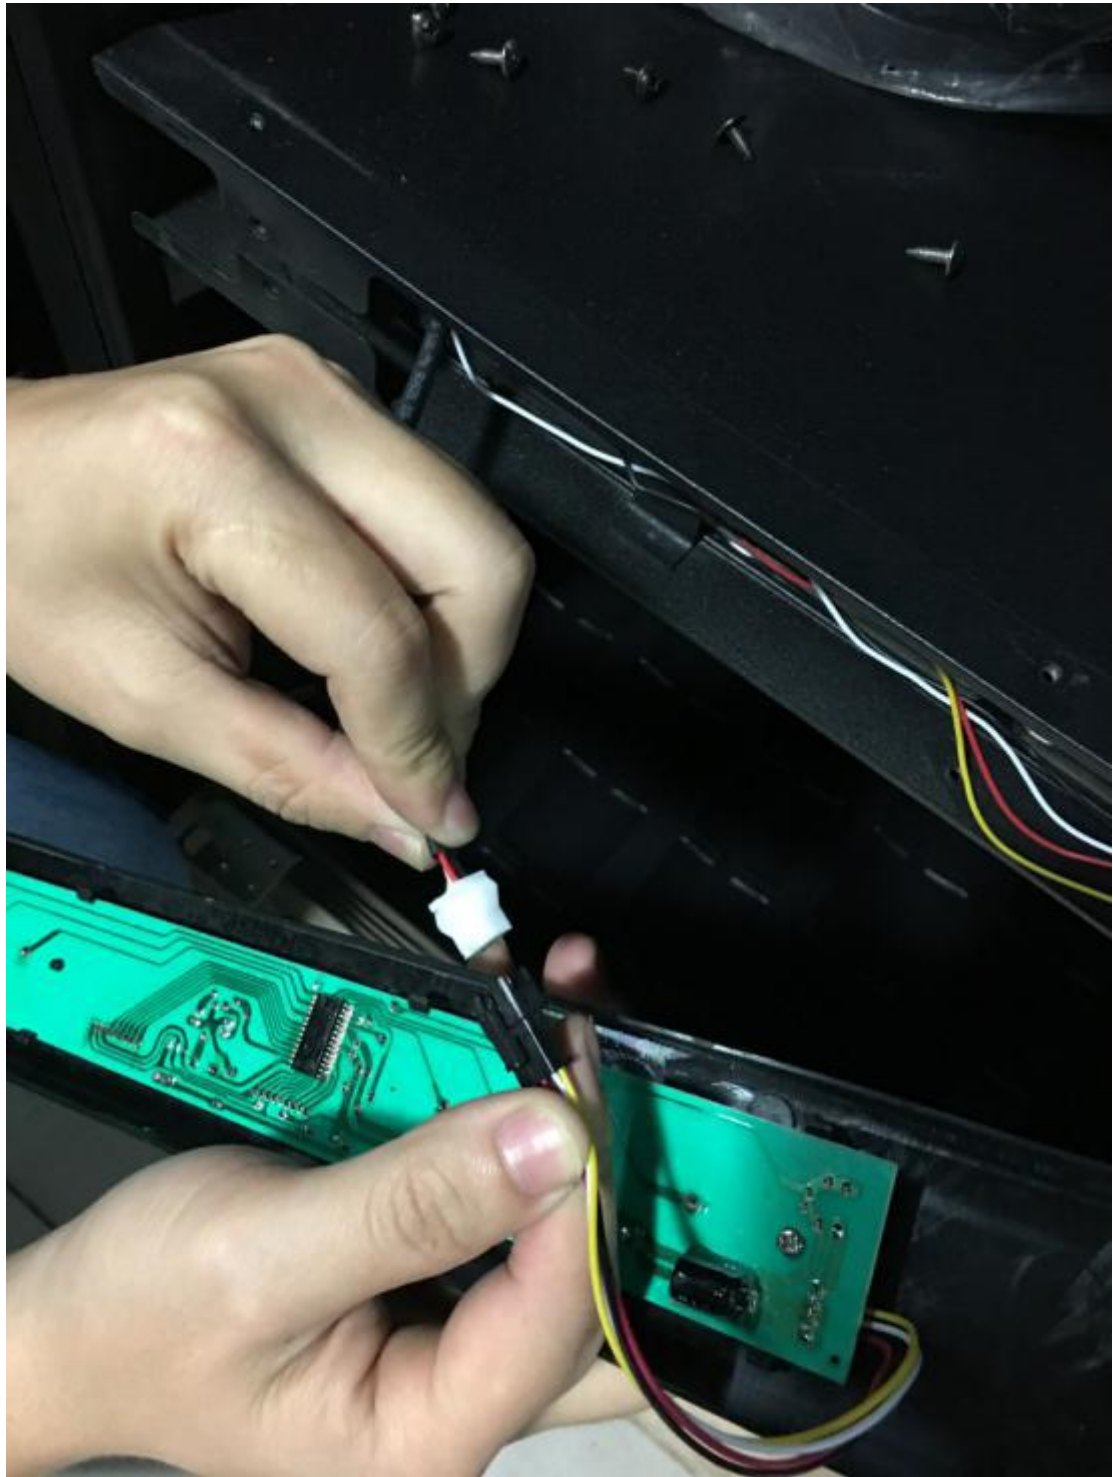




**3. Unscrew the control board, Press and pull off the control board from the holder**





**4. Replace with a new control board, install it in the holder.**



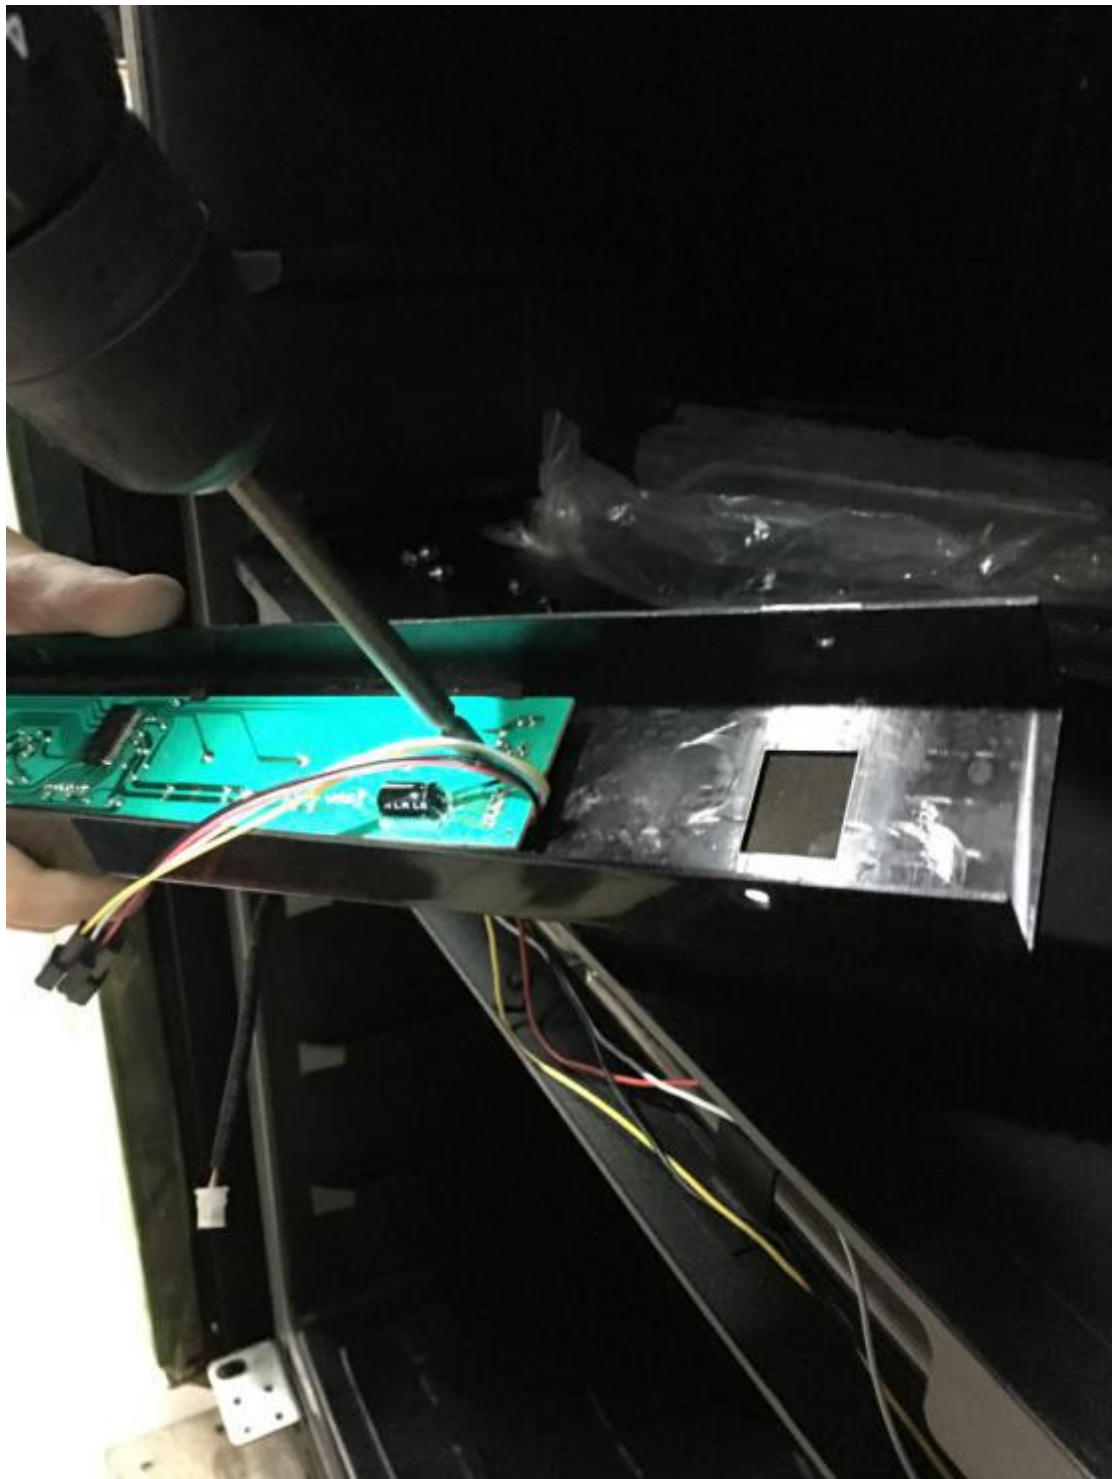



**5. Connect the wirings.**



**6. Assemble the control box and fix it by twisted screws.**



**7. Finish**